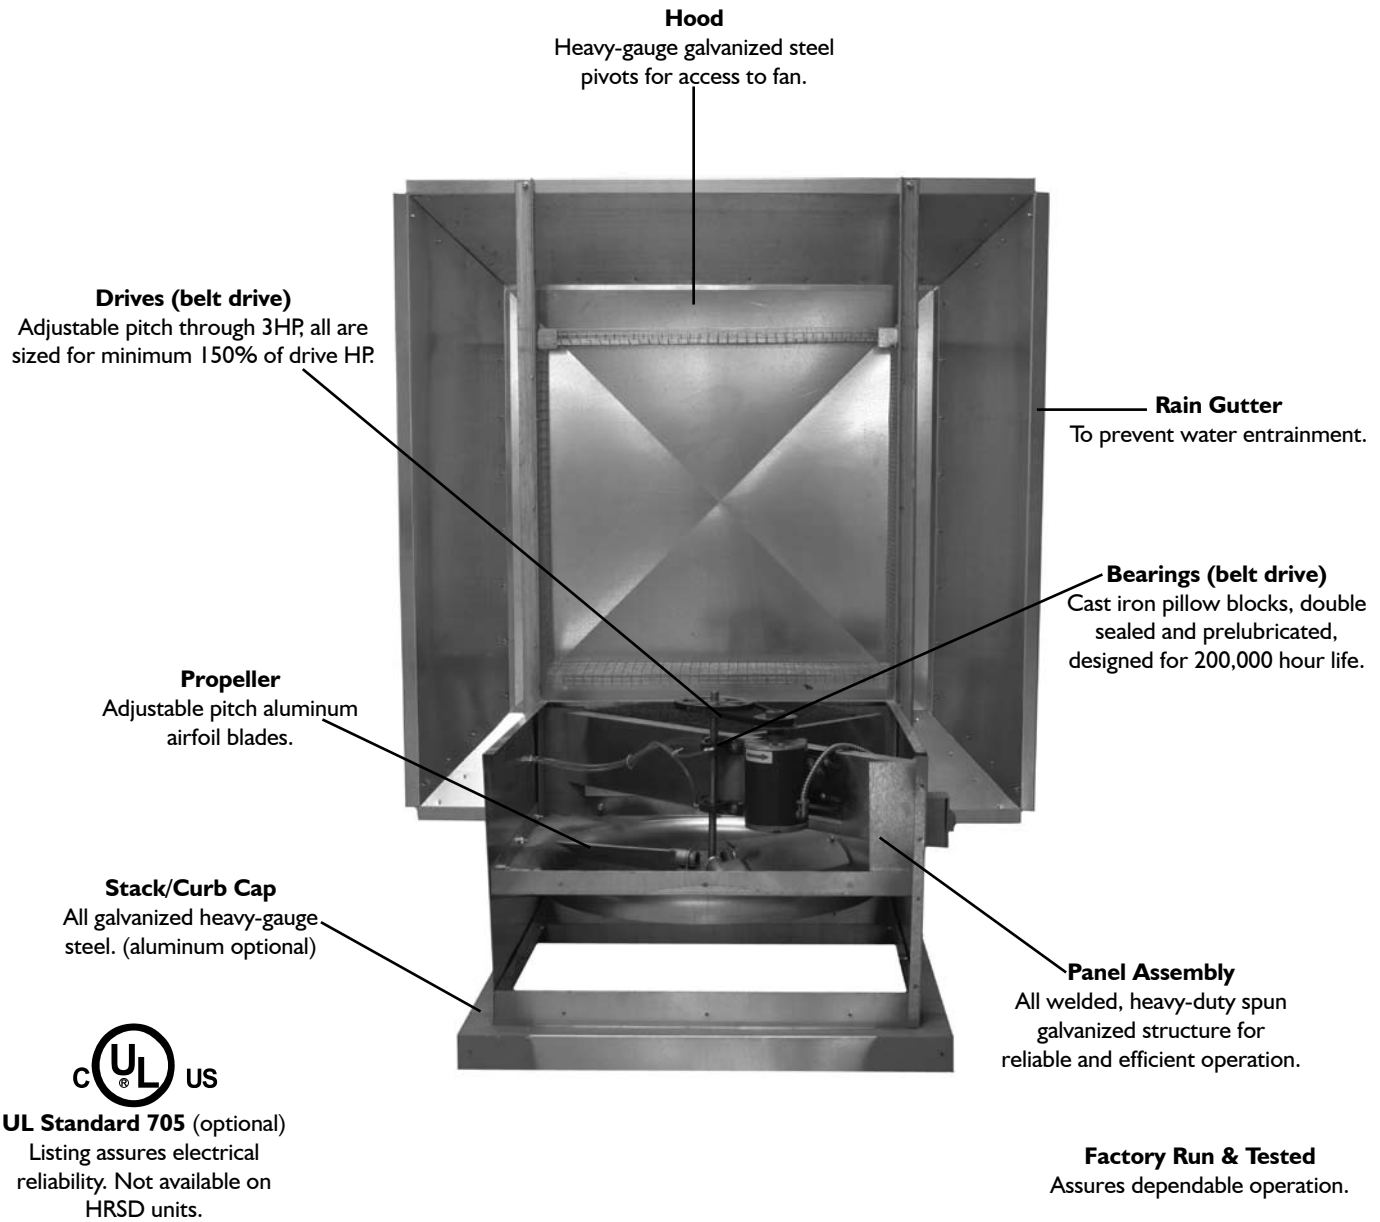

CONSTRUCTION FEATURES

Models HRSB & HRSD



Hood

Heavy-gauge galvanized steel pivots for access to fan.

Drives (belt drive)

Adjustable pitch through 3HP, all are sized for minimum 150% of drive HP.

Propeller

Adjustable pitch aluminum airfoil blades.

Stack/Curb Cap

All galvanized heavy-gauge steel. (aluminum optional)

Rain Gutter

To prevent water entrainment.

Bearings (belt drive)

Cast iron pillow blocks, double sealed and prelubricated, designed for 200,000 hour life.

Panel Assembly

All welded, heavy-duty spun galvanized structure for reliable and efficient operation.



UL Standard 705 (optional)

Listing assures electrical reliability. Not available on HRSD units.

Factory Run & Tested

Assures dependable operation.
