

# MODEL LPD LOW PROFILE DIRECT DRIVE CENTRIFUGAL ROOF/SIDEWALL EXHAUST- ER FEATURES

- Ultra Low Profile
- AMCA Air & Sound Licensed
- cULus Listed-Standard 705 (optional)
- UPS Shipping Carton
- 5 Year Housing Warranty
- Up to 140°F Airstream Temperature
- Roof or Sidewall Mount

## CONSTRUCTION


- Aluminum Construction
- Stainless Steel Exterior Fasteners
- Backward Curved Centrifugal Wheel
- Aluminum Birdscreen
- Conduit Wiring Chase
- Service Disconnect Switch
- Precision balanced to ISO Standard 1940

## MOTOR

- Unique External Rotor Design
- Permanently Lubricated Bearings
- 3 Year Motor Warranty
- Internal Thermal Protection
- 100% Speed Controllable
- 115V, 230V and 60/50 Motor Options
- Totally Enclosed and Continuous Duty

# JencoFan

6393 Powers Avenue  
Jacksonville, Florida 32217-2298  
P: 904.731.4711 / F: 904.737.8322  
www.Jencofan.com

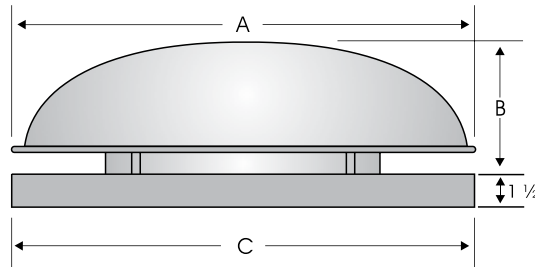

SIZE	Dimensions (Inches)						Average Ship Wt. (lbs)
	A	B	C	D	E	F	
6	16 1/2	7	16 1/2	11	14 3/4	11 3/4	15
8	16 1/2	7	16 1/2	11	14 3/4	11 3/4	20

- A - Outside diameter of unit.
- B - Height of unit above top of curb.
- C - Inside dimension of square curb cap.
- D - O.D. backdraft damper (box frame type).
- E - O.D. roof curb (std.)
- F - Recommended roof opening (MAX.) (I.D. of factory built prefab curb)



FAN SPECIFICATIONS									MOTOR SPECIFICATIONS				
Line	Qty.	Model No.	Tag	CFM	SP	Fan RPM	BHP	Sones	HP	Volts	Phase	Hertz	Encl
1													
2													
3													
4													
5													

ACCESSORY ITEMS	1	2	3	4	5	ACCESSORY ITEMS	1	2	3	4	5
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					

Project: \_\_\_\_\_ Submitted: \_\_\_\_\_  
 Customer: \_\_\_\_\_ Approved: \_\_\_\_\_  
 Location: \_\_\_\_\_