


STANDARD FEATURES

- Exhaust air up to 4,520 CFM with static pressure capabilities to 1/2" w.g.
- Constructed from die-cast aluminum and finished in a black polyester paint coating
- All models include asynchronous induction capacitor run and start motors
- Low profile design
- Class F motor insulation

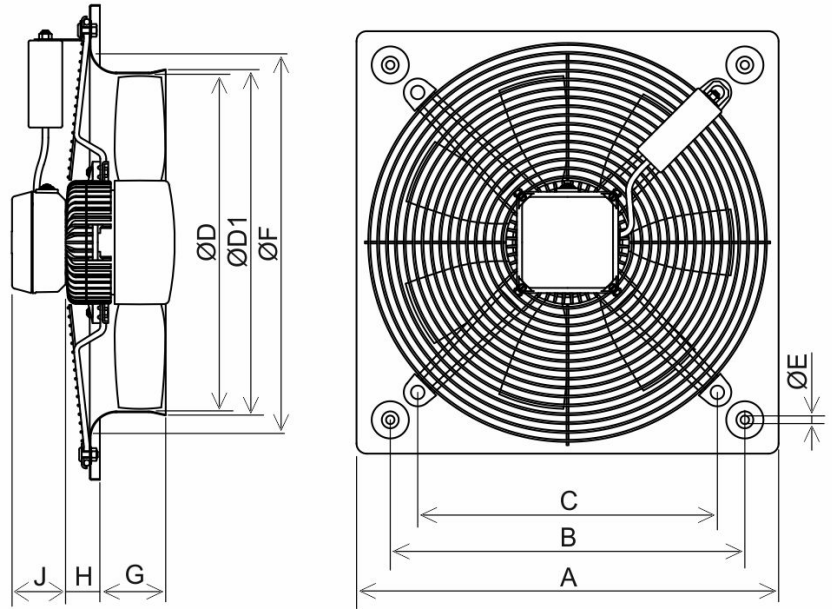

Size	A	B	C	D	D1	E	F	G	H	J	Average Ship Wt. Lbs.
12	15-3/4	12-15/16	11	12-7/16	12-5/8	3/8	12-15/16	2-11/16	1-1/4	2-9/16	15
16	19-11/16	16-5/8	13-3/4	15-3/4	16-3/16	3/8	16-5/8	3-1/16	1-5/8	2-9/16	23
18	22-1/16	18-3/4	15-3/4	17-3/4	18-1/16	3/8	18-3/4	3-9/16	1-7/8	2-9/16	32
20	24-13/16	22-1/6	17-3/4	19-11/16	20-3/16	3/8	21-1/8	3-3/16	1-3/4	2-9/16	39

FAN SPECIFICATIONS									MOTOR SPECIFICATIONS				
Line	Qty.	Model No.	Tag	CFM	SP	Fan RPM	BHP	Sones	HP	Volts	Phase	Hertz	Encl
1													
2													
3													
4													
5													

ACCESSORY ITEMS	1	2	3	4	5	ACCESSORY ITEMS	1	2	3	4	5
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					